

## FTTH Customer Terminal Box (Plastic Shell)

### Description:

The series are used in the end termination of residential buildings and villas, to fix and splice with pigtailed; Can be installed on the wall; May adapt variety of optical connection styles; Optical fiber can be managed effectively.

### Features:


- small size, light weight, pleasing in appearance
- wall mounted with mechanical protection function
- max fiber capacity 4-16 fibers, 4-16 adapter output
- available for FC, SC, ST, LC adapters
- hinge and convenient press-pull button lock design

### Specifications:

Model	Size (mm) H×W×D	Cable diameter(mm)	Cable ports	Max. capacity
FTB102	205×115×35	Φ7~Φ14	2 holes	2(single fiber)
FTB104B	150×110×30	Φ7~Φ10	2 holes	4(single fiber)
FTB104C	210×140×40	Φ7~Φ10	1 hole	4(single fiber)

## FTB102

### Picture:

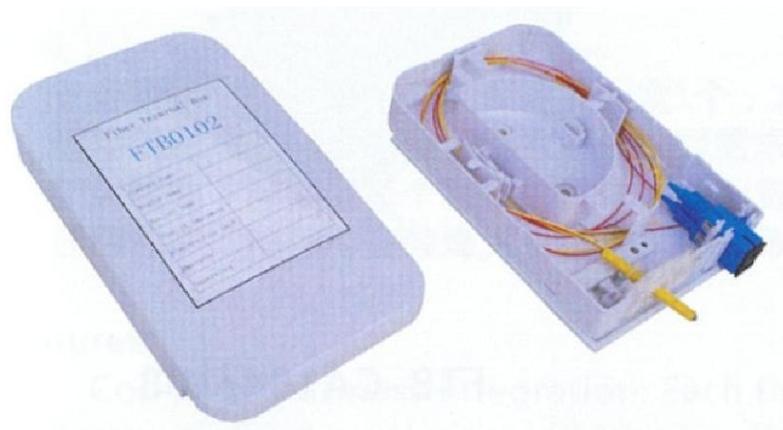


### Features:

- Small size, light weight, pleasing in appearance
- Can be installed on the wall with mechanical protective function
- May adapt variety of optical connection styles.
- Set strengthen device and fiber optic cable mounting seat
- SC 2 cores, LC 4 cores
- Suitable for indoor wall mount

## FTB104B

### Picture:

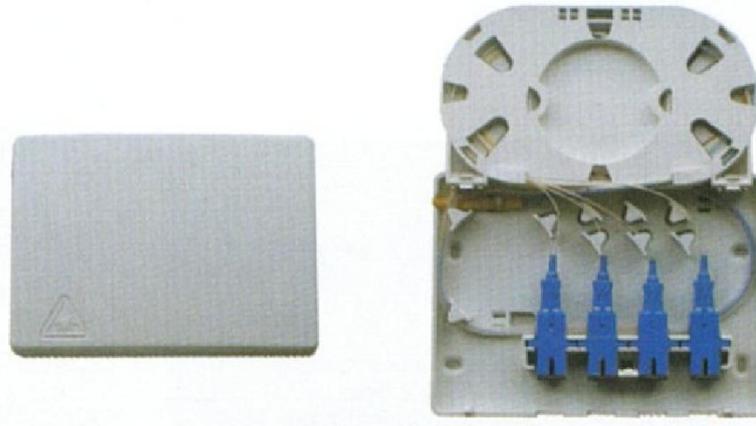

### Features:

Environmental Temperature:  $-25^{\circ}\text{C} \sim 40^{\circ}\text{C}$ ;


Max capacity: 4 fibers

Self-clip design, easy to operate

Suitable for SC, FC adapters

## FTB104C

### Picture:

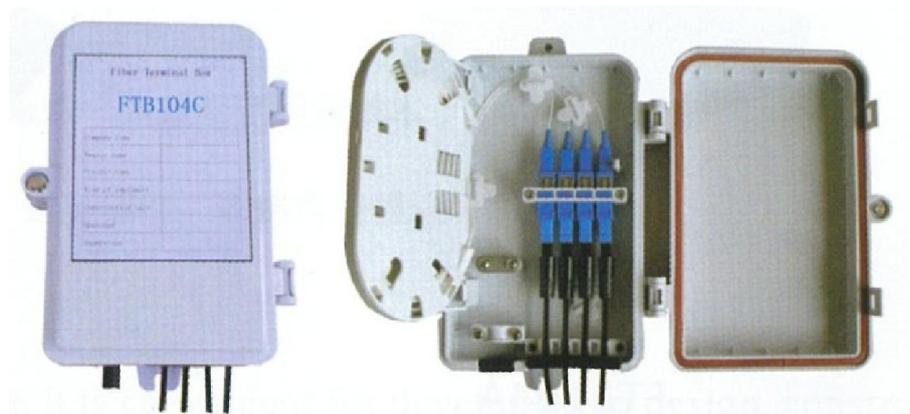

### Features:

Small size, light weight, pleasing in appearance

Can be installed on the wall with mechanical protective function

May adapt variety of optical connection styles.

Set strengthen device and fiber optic cable mounting seat

Max capacity: 4 fibers

Suitable for outdoor or indoor wall mount