


Splitter Distribution Box FDB series


Description:

Widely used in FTTH access network
 Telecommunication Network
 CATV Networks
 Data communications Networks
 Local area network


Picture:

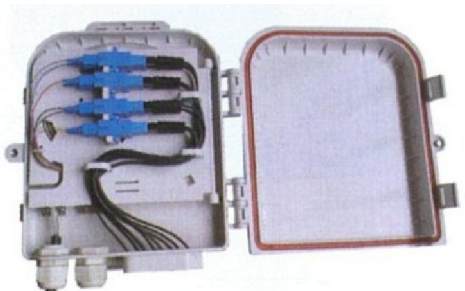

FDB-0208B

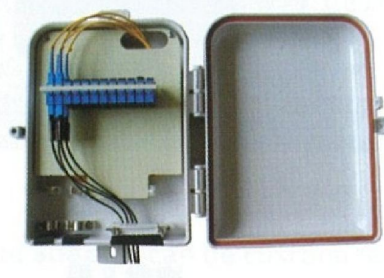

FDB-0216C-24

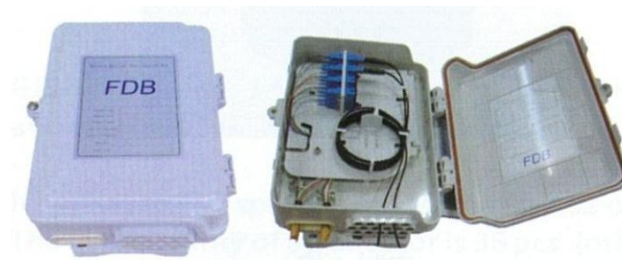

FDB-0216B

Characteristics:

Industry Standard User Interface, be made impact plastic
 Can accommodate 1x4 & 1x8 & 1x16 PLC splitter
 Anti-UV, Ultra violet resistant and rainfall resistant
 Up to 24 FTTH drops.
 Wall and pole mountable
 1~3 inlet ports, 8~24 outlet ports.

Specifications:

Model	Size (mm) W×D×H	Max. capacity
FDB-0208B	205×215×55	8 ports & splice
FDB-0216B	286×320×90	8 ports & splice
FDB-0216C-24	260×352×90	8 ports & splice