


Splitter Distribution Box Series

Description:

This product is applicable in FTTH project which is used after fiber optic cable to the building, installing in the corridor, basement, room and building's outer walls. It may distribute cables after installed splitters. It also may draw out room fiber optic cables by direct or cross-connections. It is with the function of mechanical splice, fusion splice, light splitting, wiring distributions.

Picture:

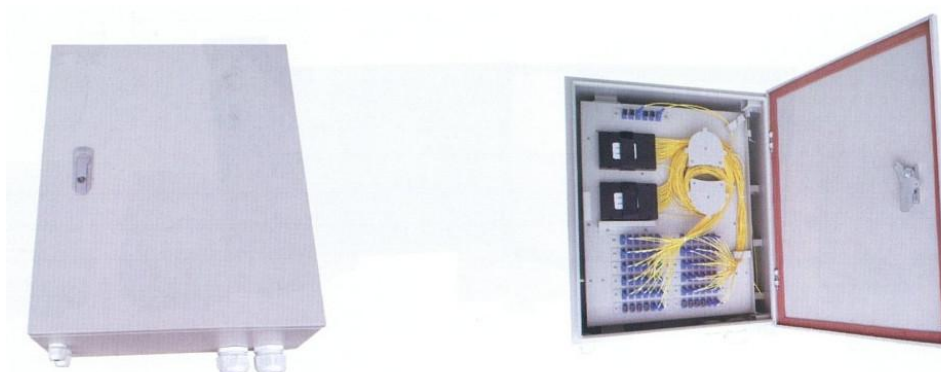

Characteristics:

High quality cold rolled steel body, electrostatic spraying with water proof powder

High quality water proof lock, wall mounted cabinet

Operating temperature:-30°C~+55°C, storage temperature: -40°C~+60°C

With access to 2 pcs of 12 cores fiber optic cables and up to 64 pcs of customer cables

Suitable for multi fiber optic cable access as well

Suitable for 72 pcs of SC,FC,ST adapters, easy to installation and maintenance

Support branch connection styles

Specifications:

Model	Size (mm) W×D×H	Max. capacity
FDB-0132B	450×350×150	48
FDB-0164B	550×450×220	72